


# MSMC130AS-18


130Wp Mono-Crystalline Solar Module



## Manufacturer of high quality module

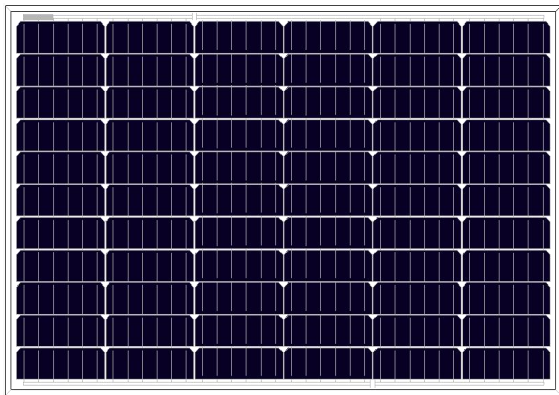

## Engineering drawing

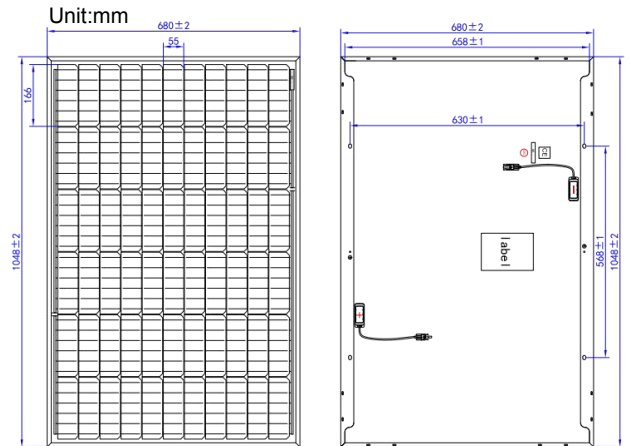

## Key Features

- Plus power tolerance: +3%
- Independent research anti-reflective and self-cleaning glass surface reduces power loss from dirt and dust
- Excellent performance under low light environments, create better kWh/kW ratio and produce average 2-3% more electricity



## Best Quality

- ★ Junction box and bypass diodes guarantee the modules free of overheating and “hot spot effect”
- ★ 100% EL double-inspection ensures modules are defects free



## Mechanical characteristics

Cell Type	Mono-crystalline 166x55
Number of cells	66 pcs (6x11)
Module Dimensions	1048x680x35 mm
Module weight	7.5 kg
Front Glass	3.2mm Low iron tempered glass
Frame	Anodized aluminum alloy
Connector	MC4 PLUG
Output Cables	S=2.5mm <sup>2</sup> /L=900mm
Junction box	IP67 with bypass-diode
Fire Safety Class	Class C (IEC61730)



## Electrical Performance

Module Type	MSMC130AS-18	
Power output	130W	
Power output tolerances	%	0~+3
Module efficiency	%	18
Voltage at Pmax	V	19.48
Current at Pmax	A	6.68
Open circuit voltage	V	22.54
Short circuit current	A	7.34
Cells efficiency	%	22 %
Operating temperature	°C	- 40 ~ + 85



## Thermal characteristics

Nominal operating cell temperature	°C	45 ± 2
Temperature coefficient of Pmax	% / °C	-0.35
Temperature coefficient of Voc	% / °C	-0.27
Temperature coefficient of Isc	% / °C	+0.03



## Electrical characteristics

